

Structural Acrylics

Permabond structural acrylic adhesives are suitable for bonding a wide variety of materials. The rapid, room-temperature cure coupled with high strength and durability make these adhesives ideal for demanding applications where speed and ease of application of the adhesive is important.


Permabond structural acrylic adhesives are suitable for a variety of applications.

They are ideal for structural bonding of metals, composites, plastics, glass, wood and other materials. Permabond's structural acrylic adhesives have excellent durability. They resist tensile, peel, cleavage, and impact forces as well as resisting the stresses of differential thermal expansion found when bonding dissimilar materials.

They are formulated with resistance in mind, so are suitable for applications that involve exposure to oils, greases, moisture and weathering.

Typical applications include :

- Magnet bonding (particularly for electric motors)
- Metal & glass furniture manufacturing
- Structural bonding - e.g. aluminium panels
- Rear view mirror attachment
- Signs

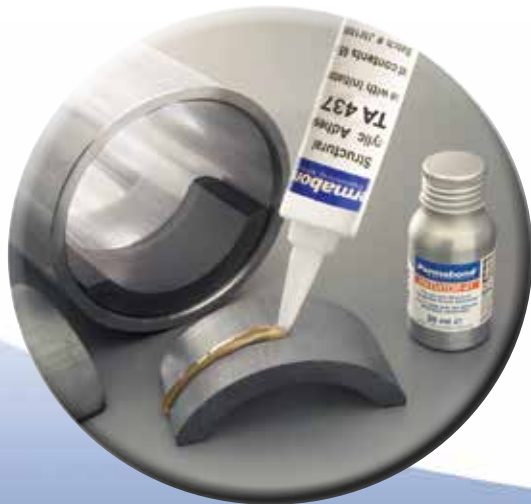

Permabond offers several types of structural acrylic adhesives:

No-Mix Adhesive & Initiator (Surface Activated)

Initiator is applied to one of the bonding surfaces and the adhesive to the other. Suited to bonding tight fitting parts, this system provides a long open time and a short cure time.

Bead on Bead Part A & Part B

A bead of one part is applied directly over a bead of the other part. No mixing is required. When the two components are pressed together, enough mixing will take place to cure the adhesive.

2-Part

Adhesive is supplied in convenient 1:1 cartridges for use with a dispensing gun. Adhesive is dispensed directly onto the substrate material via a static mixing nozzle.

Single Component - No mixing required

These adhesives are simple to apply and cure with or without an activator (activator can be used to reduce cure times to seconds and to cure through larger gaps).

Benefits

- Extremely high strength bonds increase design possibilities.
- Excellent durability to impact, peel, shear, and thermal expansion increases part life.
- Room temperature cure eliminates ovens and other equipment.
- Rapid cure increases daily output to reduce production costs.
- Bond a wide variety of substrates to increase design freedom.
- Many non-flammable grades available.
- Technical support- application specialists available for assistance with joint design, adhesive selection and production process.

Permabond[®]
Engineering Adhesives

Permabond Structural Acrylic Adhesives Selection Guide

This table represents a selection of the complete range of Permabond structural acrylic adhesives. For more detailed technical information and Technical Data Sheets, please visit www.permabond.com. To discuss your specific application requirements, please call the Permabond Helpline. Our technical advisors will recommend the best adhesive from our existing range or assist in developing a custom formulation.

| Grade | Description | Colour | Viscosity mPa.s =cP | Max. Gap Fill (mm) in | Fixture time | Working Strength (mins) | Shear Strength (MPa) psi | Service Temperature (°C) °F | Availability |
|--|---|--|----------------------------------|--------------------------|--------------|-------------------------------|-----------------------------|-----------------------------------|--------------|
| <i>No-Mix Adhesive & Initiator - [also known as Surface Activated]</i> | | | | | | | | | |
| TA430 & Initiator 41 | Very high strength bonding of metals, plastics, ceramics and wood. Fast cure on close fitting parts. | Resin: Amber Initiator: Brown Mixed: Amber | 20rpm: 20,000 2.5rpm: 50,000 | (0.5) 0.02 | 1-2 mins | 40-60 mins | (15-25) 2,200 - 3,600 | (-55 to 120) -65 to 250 | Worldwide |
| TA435 & Initiator 41 | Very high strength bonding of metals, ferrites and thermoplastics. High impact applications. | Resin: Amber Initiator: Brown Mixed: Amber | 20rpm: 30,000 2.5rpm: 70,000 | (0.5) 0.02 | 1-2 mins | 30-60 mins | (15-25) 2,200 - 3,600 | (-55 to 120) -65 to 250 | Worldwide |
| TA436 & Initiator 43 | Very high strength bonding of metals, ferrites and hard plastics. High impact and high temperature applications. | Resin: Amber Initiator: Green Mixed: Green | 20rpm: 25,000 2.5rpm: 60,000 | (0.5) 0.02 | 20-30 secs | 30-60 mins | (15-25) 2,200 - 3,600 | (-55 to 150) -65 to 300 | Worldwide |
| TA437 & Initiator 41 | For high temperature ferrites to metals applications. Note this product will cure without Initiator - see below. | Orange | 20rpm: 40,000 2.5rpm: 130,000 | (0.5) 0.02 | 20-30 secs | 30-60 mins | (14-20) 2,000 - 3,000 | (-55 to 200) -65 to 390 | Worldwide |
| TA439 & Initiator 43 | Methacrylic acid free structural adhesive for magnet bonding. Non-corrosive, ideal for sealed electric motors. High temperature resistance. | Resin: Amber Initiator: Green Mixed: Amber | 20rpm: 1,000 | (0.15) 0.006 | 20-40 secs | 3-5 mins | (20-25) 2,900-3,600 | (-55 to 165) -65 to 330 | Worldwide |
| TA459 & Initiator 43 | Methacrylic acid free structural adhesive for magnet bonding. Non-corrosive, ideal for sealed electric motors. Maximum gap fill. | Resin: Blue Initiator: Green Mixed: Green | 20rpm: 20,000 2.5rpm: 80,000 | (0.5) 0.02 | 20-40 secs | 3-5 mins | (20-25) 2,900 - 3,600 | (-55 to 165) -65 to 330 | Worldwide |
| TA4246 & Initiator 46 | No-mix resin and initiator for highest strength bonding of metal, glass, composites and plastics. | Resin: Amber Initiator: Brown Mixed: Amber | 20rpm: 23,000 | (0.5) 0.02 | 1-2 mins | 15-30 mins | (33-35) 4,800 - 5,000 | (-40 to 120) -40 to 250 | Worldwide |
| <i>Bead on Bead</i> | | | | | | | | | |
| TA440 | Bead on bead for rapid very high strength bonding of metal, glass, wood and rigid plastics. | Resin: Amber Initiator: Green Mixed: Green | 20rpm: 10,000 (mixed) | (0.5) 0.02 | 15-30 secs | 30-60 mins | (15-25) 2,200 - 3,600 | (-55 to 120) -65 to 250 | Worldwide |
| <i>Single Component</i> | | | | | | | | | |
| TA437 | For high temperature ferrites to metals applications. Note cure speed can be increased with Initiator 41 see above. | Orange | 20rpm: 40,000 2.5rpm: 130,000 | (0.5) 0.02 | 5 - 10 mins | 1-2 hrs | (14-20) 2,000 - 3,000 | (-55 to 200) -65 to 390 | Worldwide |

† Cure-speed is dependent on gap, substrates being bonded and temperature. For further information please contact Permabond for individual technical & safety data sheets.

Permabond Structural Acrylic Adhesives Selection Guide

This table represents a selection of the complete range of Permabond structural acrylic adhesives. For more detailed technical information and Technical Data Sheets, please visit www.permabond.com. To discuss your specific application requirements, please call the Permabond Helpline. Our technical advisors will recommend the best adhesive from our existing range or assist in developing a custom formulation.

| Grade | Description | Colour | Viscosity mPa.s =cP | Max. Gap Fill (mm) in | Fixture Time | Working Strength (mins) | Shear Strength (MPa) psi | Service Temperature (°C) °F | Availability |
|------------------------------|---|--|--------------------------|--------------------------|----------------|-------------------------------|-----------------------------|-----------------------------------|--------------|
| <i>Surface Activated MMA</i> | | | | | | | | | |
| TA4246 | No-mix resin and initiator for highest strength bonding of metal, glass, composites and plastics. | Resin: Amber Initiator: Brown Mixed: Amber | 20rpm: 23,000 | (0.5) 0.02 | 1-2 mins | 15-30 mins | (33-35) 4,800 - 5,000 | (-40 to 120) -40 to 250 | Worldwide |
| <i>2-part • 1:1 Mix MMA</i> | | | | | | | | | |
| TA4200 | 2-part 1:1 rapid curing, gap filling, toughened. Ideal for structural bonding of aluminium. | A: Cream B: Cream Mixed: Cream | 20rpm: 45,000 (mixed) | (4) 0.16 | 7-10 mins | 25-35 mins | (23-25) 3,300-3,600 | (-40 to 120) -40 to 250 | Europe |
| TA4202 | 2-part 1:1 very rapid cure. Can be applied bead on bead; multipurpose. | A: Pink B: Green Mixed: Purple | 20rpm: 45,000 (mixed) | (3) 0.12 | 2-3 mins | 20-25 mins | (19-21) 2,800-3,000 | (-40 to 120) -40 to 250 | Europe |
| TA4204 | 2-part 1:1 very rapid cure. Can be applied bead on bead; multipurpose. Crystal clear appearance. | A: Clear B: Clear Mixed: Clear | Thixo paste | (3) 0.12 | 1:30-2:30 mins | 20-25 mins | (19-21) 2,800-3,000 | (-40 to 120) -40 to 250 | Europe |
| TA4205 | 2-part 1:1 rapid cure. Can be applied bead on bead; multipurpose. Crystal clear appearance. | A: Clear B: Clear Mixed: Clear | Thixo paste | (3) 0.12 | 3-4 mins | 25-30 mins | (19-21) 2,800-3,000 | (-40 to 120) -40 to 250 | Europe |
| TA4210 | 2-part 1:1 longer handling time than TA4200, gap filling, toughened. Ideal for structural bonding of aluminium. | A: Cream B: Green Mixed: Beige | 20rpm: 45,000 (mixed) | (4) 0.16 | 20-25 mins | 50-60 mins | (23-25) 3,300-3,600 | (-40 to 120) -40 to 250 | Europe |
| TA4810 | 2-part 1:1 develops strength rapidly. Toughened, ideal for structural bonding of plastics & unprimed metals. | A: Off-white B: Amber Mixed: Cream | 20rpm: 50,000 (mixed) | (2) 0.08 | 10-15 mins | 50-60 mins | (21-28) 3,000-4,000 | (-40 to 120) -40 to 250 | Americas |
| TA4820 | 2-part 1:1 longer handling time than TA4810. Toughened, ideal for structural bonding of plastics & unprimed metals. | A: Off-white B: Amber Mixed: Cream | 20rpm: 50,000 (mixed) | (2) 0.08 | 30-35 mins | 100-120 mins | (21-28) 3,000-4,000 | (-40 to 120) -40 to 250 | Americas |

† Cure-speed is dependent on gap, substrates being bonded and temperature. For further information please contact Permabond for individual technical & safety data sheets.

Permabond Worldwide

Wherever your manufacturing or R&D site may be located, Permabond representatives can be called upon to assist you. We have an extensive network of professional distributors worldwide.



www.permabond.com

- Americas +1 732 868 1372
- US 800-640-7599
- Asia + 86 21 5773 4913
- Europe +44 (0) 1962 711661
- UK 0800 975 9800
- Deutschland 0800 111 388
- France 0805 111 388

info.americas@permabond.com
info.europe@permabond.com
info.asia@permabond.com

The information given and the recommendations made herein are based on our experience and are believed to be accurate. No guarantee as to, or responsibility for, their accuracy can be given or accepted, however, and no statement herein is to be treated as a representation or warranty. In every case we urge and recommend that purchasers, before using any product, make their own tests to determine, to their own satisfaction, its suitability for their particular purposes under their own operating conditions. Always refer to current product technical datasheet for most recent and accurate technical information.