


THERMAL PAD - DTI90S

Features

- Thermal conductivity: 1.6 W/mK
- Resistant to tears and punctures
- Cost effective solution
- High dielectric breakdown of up to 5.0 kV/mm
- Custom die-cut parts: custom configurations available

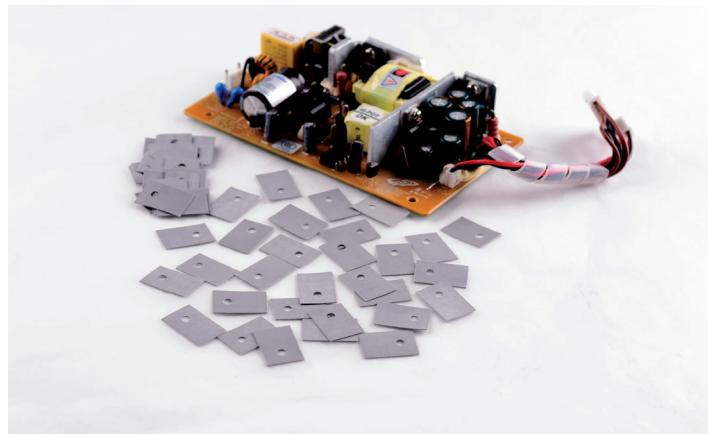

Applications

- Electrical power generators
- Switching mode power supplies
- Singal amplifiers
- Medical equipment
- PC server/workstations
- AC/DC power converters



TECNITE DTI90S

Properties	Unit	DTI90S	Test Method
Composition		silicone & fiberglass	
Colour		Brown red	
Thickness range	mm	0.23 (± 0.3)	
Hardness	Shore A	75 (± 5)	ASTM D2240
Density	g/ml	2.5	ASTM D792
Elongation	%	-	ASTM D412
Temperature range	°C	-40 to 150	EN344
Breakdown voltage	kV/mm	≥ 5.0	ASTM D149
Volume impedance	ohm*cm	1.7×10^{16}	ASTM D257
Weight dampify	%	≥ 1	@ 150 °C 240H
Thermal conductivity	W/mK	1.6	ASTM E1461
Thermal impedance	°C-in ² /W	0.663 @ 10 psi 0.620 @ 25 psi 0.568 @ 50 psi 0.526 @ 100 psi	
Compliances		UL 94 V-0	
Sheet sizes		Standard: Die-cut rolls: width: 300 mm * length: 50 m Custom die-cut parts available. Available with acrylic PSA tape for improved application on one or both sides: <ul style="list-style-type: none">• 3M Double Coated Tape 9448HK (will make the pad 0.15 mm thicker on both sides)• 3M Transfer Tape 3M467 (will make the pad 0.06 mm thicker on both sides)	

Custom configurations

- 3M Double Coated Tape 9448HK (will make the pad 0.15 mm thicker on both sides)
- 3M Transfer Tape 3M467 (will make the pad 0.06 mm thicker on both sides)

DISTRIBUTORS GROUP EUROPE

Handelsweg 6, NL - 2404 CD Alphen aan den Rijn, The Netherlands
 Tel. 0031-172-436361 Fax 0031-172-420310
info@dge-europe.com www.dge-europe.com

