

## Data Sheet

## VAC VIEW 10

### Vacuum leak indicator

#### ■ DESCRIPTION


The Vac View 10 leak indicator allows the instant detection of both high and low level leakages within a vacuum bag. Airflow through the Vac View causes the internal ball to oscillate and float inside the acrylic body, displaying a definite airflow reading which can be read off against the scale. This allows the size of the leak to be easily quantified.

#### ■ BENEFITS

- Check vacuum bags for leaks more quickly than vacuum drop testing.
- See leak rate reduce as leaks are found and sealed off by hand.
- Simple low cost tool for use in and around the workshop.

#### ■ TECHNICAL DATA

Construction	Acrylic body with carbon steel connections
Range	0 to 10 SCFH (0 to 4,7 litres / minute)
Graduations	0,5 SCFH
Figure interval	2
Quick disconnect plug	1/4 inch
Quick disconnect socket	1/4 inch

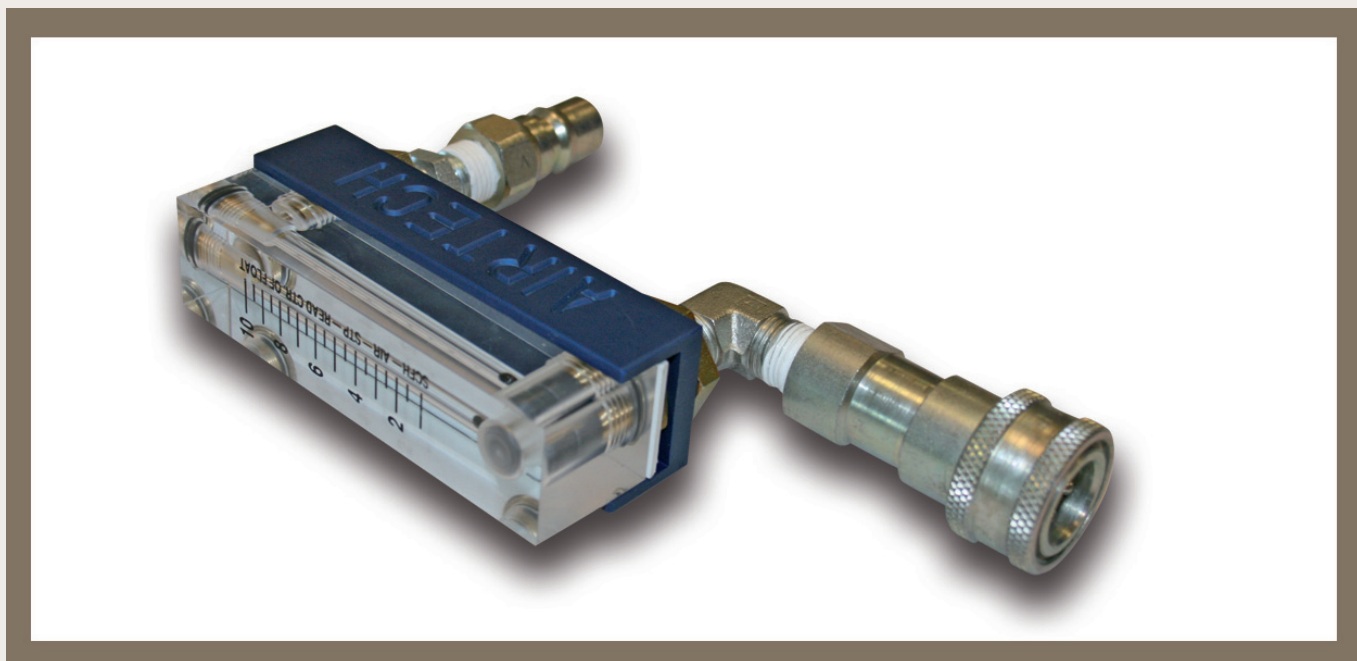

#### ■ NOTES

- Push coupling of the Vac View 10 onto the through bag connector plug on tool.
- Allow collar to retract fully ensuring a vacuum tight connection.
- Connect vacuum source to plug on Vac View 10 and pull vacuum.
- Any airflow will be indicated as internal ball floats and registers reading on scale.
- Check bag for leaks until no airflow apparent.

Last updated : 2015-11-05

Catalogue position : [Vacuum valves and hoses](#)