

Data Sheet

FLOWLEASE 75-37P16

Combined product

DESCRIPTION

Flowlease 75-37P16 combines Greenflow 75 flow mesh with a layer of our perforated release film Wrightlon® 3700 P16 and is intended to be used in resin infusion applications. The mesh is designed to efficiently distribute resin with little waste due to the low profile and tight construction. A high resin infusion flow can be achieved with most resin types. Great labour savings can be achieved by having combination of products applied in one operation as opposed to applying one layer at a time. Flowlease 75-37P16 will be applied on the top of the carbon or fibreglass fabrics or on the top of the peel ply.

BENEFITS

- Low resin waste.
- Labour saving in application.
- Fast infusion.

TECHNICAL DATA

Maximum use temperature 121°C
Shelf life Unlimited when stored in original packaging at 22°C


Technical data - Film

Material type Polyolefin
Thickness 25 µm
Colour Blue
Perforation style P16

Technical data - Flow mesh

Material type Polypropylene
Configuration of net Extruded
Mesh weight 98 g/m²
Colour Green

Width	Length
1,50 m (59 inches)	100 m (328 feet)

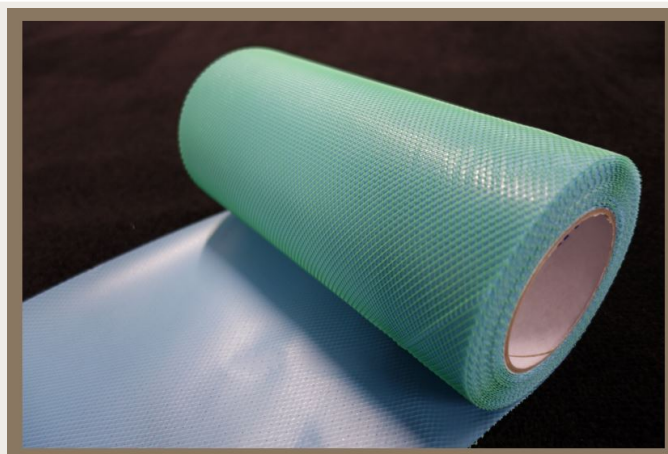

NOTES

- This product is an extruded net and does not fray when cut.
- Other combination available upon your detailed request, see Combo-Tech data sheet.
- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.

Last updated : 2023-06-28

Catalogue position : [Combination Products / Custom Kitting](#)