

Data Sheet

DAHLTRAM® U-350CF

High temperature additive manufacturing

DESCRIPTION

Dahltram® U-350CF is a cost effective, high temperature use, additive manufacturing polymer with a maximum recommended use temperature of 204°C. It is reinforced with carbon fibre for maximum strength and long term performance. Dahltram® U-350CF is ideal for high temperature tooling solutions and high temperature master moulds. Additionally, it is vacuum tight, autoclave capable, and can be machined to the tolerances and surface finish required.

BENEFITS

- Additive manufactured tools can go from conception to the production floor in days not weeks.
- Dahltram® U-350CF is a cost effective solution ideal for 176°C cure systems and much more.
- Provides higher strength, higher temperature performance with lower creep.
- Carbon reinforcement offers greater stiffness versus glass and low warpage for predictable results.

TECHNICAL DATA

Physicals	Typical Values	Test Method
Base Polymer	Modified PESU	
Reinforcements	Carbon Fibre	
% Fibre Loading	25%	
Tensile Strength		
X Direction	115 MPa	Modified ASTM D638
Z Direction	50,3 MPa	Modified ASTM D638
Tensile Modulus		
X Direction	11,7 GPa	Modified ASTM D638
Z Direction	3,8 GPa	Modified ASTM D638
Flexural Strength		
X Direction	194,8 MPa	Modified ASTM D790
Z Direction	106,9 MPa	Modified ASTM D790
Flexural Modulus		
X Direction	13,1 GPa	Modified ASTM D790
Z Direction	4,1 GPa	Modified ASTM D790
HDT, 1,82 Mpa, 3,22 mm	215°C	ASTM D648 (Annealed)
Water Absorption (24 hr)	TBD	
Density as Printed	1,29 g/cc	ASTM D792

*Where X is the bead print direction and Z is through the bead thickness.

SIZES

Weight	Packaging	Form
25 kg (55 lb)	Bag	Pellet
100 kg (220 lb)	Drum	Pellet
590 kg (1,300 lb)	Box	Pellet


Last updated : 2024-01-09

Catalogue position : [Print-Tech®](#)

Data Sheet

DAHLTRAM® U-350CF

High temperature additive manufacturing

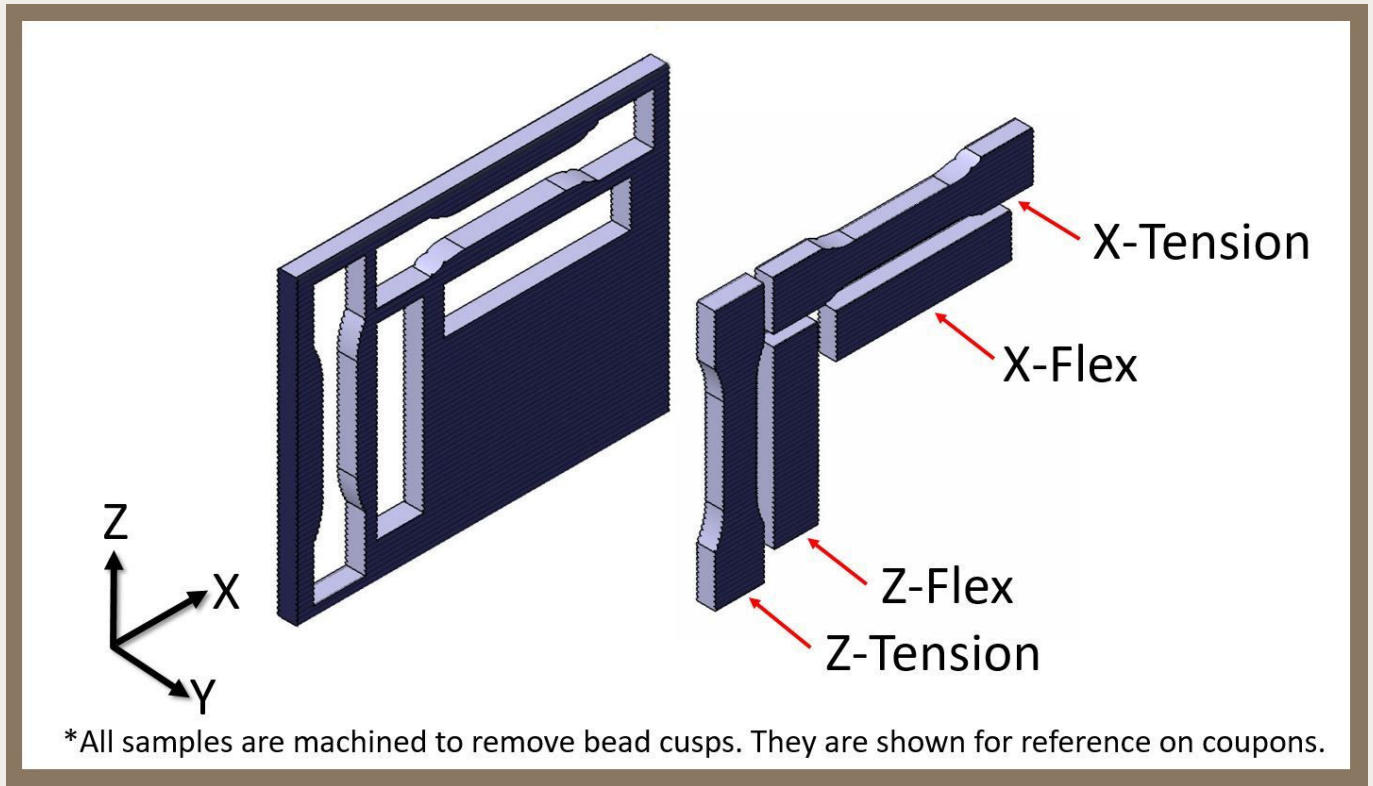

NOTES

- The maximum use temperature is dependent upon the duration at maximum temperature, and is process specific, Airtech recommends testing prior to use.
- Shelf life unlimited when stored in original packaging at 22°C.

Last updated : 2024-01-09

Catalogue position : [Print-Tech®](#)